

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representation of  
The original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:	A1	(11) International Publication Number:	WO 99/00074
A61F 2/44		(43) International Publication Date:	7 January 1999 (07.01.99)

(21) International Application Number: PCT/GB98/01707

(22) International Filing Date: 25 June 1998 (25.06.98)

(30) Priority Data: 971330.0 25 June 1997 (25.06.97) GB

(71) Applicant (for all designated States except US): BRID-PORT-GUNDRY PLC (GB/GB); Percutallu Implants, Tancred Street, Tanton, Somerset TA1 1RY (GB).

(72) Inventors; and  
(75) Inventor/Applicants (for US only): McLEOD, Alan, Roy, MSc (GB/GB); Percutallu Implants, Tancred Street, Tanton, Somerset TA1 1RY (GB); JACKOWSKI, Andre (GB/GB); Royal Orthopaedic Hospital NHS Trust, Woodlands, Northfield, Birmingham B31 2AP (GB).

(74) Agent: PAWL,YN, Anthony, Neil; Urquhart-Dykes & Lord, Tower House, Meriton Way, Leeds LS2 8PA (GB).


Published  
With international search report.

(31) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BI, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TO).

(54) Title: SURGICAL IMPLANT

(57) Abstract

A prosthesis for the replacement of an intervertebral disc of the spine comprises a block (6) of an elastomeric material which is held under compression by a surrounding tensile fabric (72). A pre-tensioning fabric (56) forming an invagination, with the continuation (74) of the upper fabric (72) passing through a hole (80) in the lower fabric and being attached to the lower vertebral body (22) and the continuation (76) of the lower fabric crossing to its fixation site on the upper vertebral body (20).

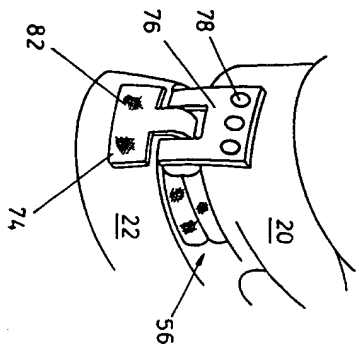

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Switzerland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Moldova	TO	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TT	Trinidad and Tobago
BE	Belgium	GN	Guinea	MK	Macedonia	TM	Turkmenistan
BF	Burkina Faso	HT	Haiti	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MR	Mauritania	UA	Ukraine
BI	Burundi	IE	Ireland	MW	Malawi	UG	Uganda
BJ	Benin	IL	Israel	MX	Mexico	UZ	United States of America
BR	Brazil	IS	Iceland	NE	Niger	VN	Viet Nam
BY	Belarus	IT	Italy	NG	Nigeria	ZW	Zimbabwe
CA	Canada	JP	Japan				
CF	Central African Republic	KE	Kenya				
CG	Congo	KG	Kyrgyzstan				
CH	Switzerland	KZ	Kazakhstan				
CI	Cote d'Ivoire	KR	Republic of Korea				
CM	Cameroon	KW	Kuwait				
CN	China	LA	Laos				
CU	Cuba	LC	Saint Lucia				
CZ	Czech Republic	LI	Liechtenstein				
DE	Germany	LK	Sri Lanka				
DK	Denmark	LR	Liberia				
EE	Estonia						

-1-

## SURGICAL IMPLANT

This invention relates to surgical implants particularly, but not exclusively, for the replacement of an intervertebral disc of the spine, but also applicable to other indications such as the replacement of a joint within a finger or a toe.

Various forms of disc replacement are in use, although historically, the favoured treatment particularly for a failed cervical disc has been disectomy followed by fusion, using a block or plug of bone inserted into the front of the disc space and abutting into the vertebrae above and below. This bone graft may or may not be stabilised using a plate which is fastened across the front of the disc space. Although fusion may relieve the symptoms for which the surgery was indicated, the loss in mobility of the particular spinal segment is undesirable, particularly in the cervical spine. The fusion of the disc segment also results in hypermobility of the motion segments above and below the fusion with increased strain on the adjacent discs, which can result in their accelerated degeneration, which will in turn require surgical intervention. Fusion using bone graft will have associated donor site morbidity if the bone is autograft or associated risks of infection if the bone is allograft.

Alternatively, following the disectomy the disc space may be left empty, but this leads to hypermobility problems at the operative level, kyphosis, spontaneous fusion and a loss in foraminal height.

Disc prostheses based on either articulating metal plates or metal end plates supporting a polyethylene spacer are in clinical use. Articulating devices reduce the loss in spinal mobility and the degeneration of adjacent discs. However, positioning of the articulating disc prosthesis is critical, with complete failure resulting from even a small error in positioning. The articulation also tends to be non-viscoelastic, uses a fixed axis of rotation, is under constrained in axial rotation and distraction and is therefore unphysiological, not entirely emulating normal motion. As well

-2-

as the general geometry mismatch, such prosthesis can also be adversely affected by the ingrowth of scar tissue. The long term effect of wear from the articulating surfaces may also be detrimental and there is a high risk of the device being pushed out of the disc space as a result of the failure to precisely match the physiological motion of the spine.

The object of this invention is to provide an artificial disc that attempts to recreate the physiological movement of the spine and also to provide the means to secure the artificial disc in situ both immediately post-operatively and in the long term.

According to the invention, the disc prosthesis comprises a block of an elastomeric or viscoelastic material which is encapsulated by a textile fabric.

The block could equally well be referred to as a core or insert provided within the textile fabric of the prosthesis. Block, core and insert and used in an interchangeable manner in this document.

Preferably the block is formed of silicon rubber. Preferably the block has a Shore A scale hardness of 35 to 80°.

The block is preferably formed of a biocompatible material. The block may be formed of a reabsorbable material.

Preferably the block provides substantially equivalent properties and / or behaviour to the nucleus pulposus of a natural disc, for instance during compression and / or distraction and / or horizontal gliding and / or axial rotation and / or flexion and / or extension.

The block may be provided with a flat upper surface and / or a flat lower surface. The block may be provided with upper and / or lower surfaces that are curved in a convex manner. The maximum thickness of such blocks may be centrally provided. The provision of both planar upper and / or lower surfaces is preferred. The area of the upper surface is preferably greater than the area of the lower surface. The maximum width of the upper surface is preferably greater than the maximum width of the lower surface. The minimum width of

-3-

the upper surface is preferably greater than the minimum width of the lower surface.

The block may be provided with sides extending between the upper and lower surfaces. The sides may be planar or curved, most preferably curved in a convex manner.

Although the front thickness of the block may be less than the back thickness of the block, preferably the front thickness of the block is more than the back thickness of the block. The front being the portion of the block nearer the front of the spine in use. The thickness of the front and back of the block may be equal and less than the thickness at a point midway, for instance midway, between the front and the back of the block.

The block may be wider towards the rear face than towards the front face, but the block is preferably wider towards the front face than towards the rear face. The width may decrease in a linear manner from in proximity to the front face to in proximity to the rear face of the block.

The interface between the sides and top and / or bottom surfaces may be curved. The interface between the sides and front and / or rear faces of the block may be curved. The interface between the front and / or rear face and the top and / or bottom faces may be curved.

Preferably the maximum length,  $l$ , from the front face of the block to the rear face of the block is between 8 and 18mm and more preferably between 10 and 15mm. Preferably the maximum width of the upper surface is between 10 and 18mm, and more preferably between 12.5 and 16.5mm. Preferably the minimum upper width is between 8 and 15mm and more preferably between 9.5 and 13.5mm. Preferably the maximum lower width is between 9 and 16mm, and more preferably between 10.5 and 14.5mm. Preferably the minimum lower width is between 7.5 and 13.5mm and more preferably between 8.5 and 12.5mm.

Preferably the maximum thickness of the block is between 2 and 6mm, and more preferably between 2.5 and 5.5mm. Preferably the minimum thickness of the block is between 1.25 and 4.75mm and more preferably between 1.75 and 4.25mm.

-4-

The block may be provided according to any four dimensions, more preferably any five, or any six, or any seven, or eight, or nine dimensions of any one of the blocks provided in Table 1 included herein, the dimensions including dimension sizes  $\pm 0.25$ mm on the values listed.

A particularly preferred form of the block provides planar upper and lower surfaces, the upper surface having a greater width than the lower surface, the block having a greater thickness towards the front face than towards the rear face. The front face may be planar and / or the rear face may be curved.

In one embodiment of the invention, the encapsulated disc prosthesis is preferably a rectangular block (although it may have a circular or oval cross-section). Typical dimensions for a disc prosthesis for the cervical spine would be 13mm wide by 12mm deep by 4mm in height.

The fabric may be made of polyester or any other suitably strong flexible and biocompatible material. The fabric may be formed of, or comprise, materials including polyester, polypropylene, polyethylene, carbon fibre, glass fibre, polyaramide, metal, copolymers, polyactic acid, polyglycolic acid, biodegradable fibres, silk, cellulosic and polycaprolactone, including mixtures of one or more of these materials and including fibres made therefrom.

The textile fabric may be formed using weaving, knitting, braiding or embroidery.

The fabric may be produced in the desired profile or may be reduced to the desired profile from a larger amount of fabric, for instance by cutting or pressing. The fabric may be or may also be made of a resorbable material.

The structure and / or properties of the fabric may be selected to encourage tissue ingrowth.

The fabric component may be formed from a planar fabric element. The fabric component may be formed from a piece of fabric having a first portion and a second portion, the first and second portions being joined by an integral part of the fabric or by an attaching technique, such as stitching.

-5-

Preferably the first and second portions are folded, or otherwise provided in opposition to one another, to give the block encapsulating portion of the fabric component. The edges of the first and second portions may be stitched or otherwise attached to one another to provide the encapsulating portion of the fabric component. A pocket, open at one end, may be formed in this way.

The fabric component may be provided with one or more further portions, preferably attached to the first and / or second portion, to provide closure for the pocket receiving the block.

A single further portion, extending across the opening may be provided.

The first further portion attached to the first portion and a second further portion attached to the second portion may be provided, the first and second further portions being attached to one another to provide closure for the pocket.

The first and second further portions may extend from the first and second portions, for instance to form flanges. These further portions / flanges may be attached to the vertebrae adjacent to the prosthesis in use. In such cases the first further portion may be attached to the vertebrae adjacent the first portion of the encapsulating material and the second further portion may, additionally or alternatively, be attached to the vertebrae adjacent the second portion of the encapsulating material.

In a preferred embodiment of the invention, one of the first or second further portions is provided with an aperture. The other further portion may be provided with a reduced dimension neck in such instances. Preferably the first and second further portions are interdigitated in the assembled form. Interdigitation may be affected by passing one of the further portions through the aperture in the other further portion. The first further portion may be attached to the vertebrae adjacent the second portion of the encapsulating material and / or the second further portion may be attached to

-6-

the vertebrae adjacent the first portion of the encapsulating fabric.

The gap between the vertebrae may be spanned by a separate fabric element from the prosthesis and attached to the vertebrae adjacent the prosthesis. This element may provide closure of the prosthesis. In an alternative form the element may be provided as a continuation of the first or second further portions of the prosthesis fabric material.

The first and / or second further portions and / or the separate element may be provided with apertures to receive anchors.

Anchors such as bone screws, staples or the like may be employed.

In a particularly preferred form of the invention a portion of one of the further portions passes through an aperture or gap in the other further portion, and an element is provided within the pocket between the block and the location where the one further portion passes through the other. The element is preferably a pad or cushion of resilient but deformable material, for instance the fabric used for the encapsulating fabric. The element may be discrete from the encapsulating fabric. It is preferred, however, that the element be formed of the fabric material and that it be integral with the encapsulating fabric material. The element may be formed by folding a portion of the fabric material. Multiple folds may be used to form the element. The fabric forming the element may be provided on one or both of the further portions and / or on one or both of the portions of the fabric material and / or at the junction between a portion and its further portion. Preferably the block is constrained and / or retained by the fabric, but is not attached to the fabric.

Encapsulation may be provided by fully enclosing the block within the fabric. Encapsulation may be provided by providing the block within a fabric constraint. The fabric constraint, may for instance, engage some or all of the corners and / or some or all of the edges of the block, but be absent from one or more portions of the faces.

-7-

The encapsulation of the elastomeric block may be by insertion of a solid block or injection of a liquid into a textile receptacle. The textile receptacle may be formed by stitching or sealing closed the ends of a tubular fabric or by folding a fabric onto itself and stitching or sealing closed the free edges.

Preferably the fabric compresses the block.

Preferably one or more prostheses as herein defined provide a complete disc replacement, most preferably in the cervical portion of the spine.

Preferably, a single disc prosthesis, comprising for instance an elastomeric block held under compression by an encapsulating textile fabric, is inserted into the disc space from the front of the spine. Alternatively, a pair of disc prostheses may be inserted into the disc space from the back of the spine.

Preferably the prosthesis is between two adjacent vertebrae, with the front edge of the textile fabric being level with the front edge of the vertebrae and the elastomeric block recessed relative to the front edge of the vertebrae. Recessing of the block by between 1 and 4mm is preferred.

Preferably the block component of the prosthesis acts as a replacement for the nucleus pulposus, the fabric provides a replacement for the annulus, and optionally, the flange elements provide a replacement for the anterior longitudinal ligament which is the ligament extending along that portion of the spine.

According to a second aspect of the invention we provide a method of producing a disc prosthesis, the method comprising providing a block of an elastomeric or visco-elastastic material and forming an encapsulating textile fabric component, the block being placed within the fabric component.

According to a third aspect of the invention we provide a set of two or more prostheses according to the first aspect of the invention and incorporating blocks of different sizes.

According to a fourth aspect of the invention we provide a surgical technique for providing a disc prosthesis, the

-8-

technique comprising removing the natural disc and replacing the disc with a prosthesis according to the first aspect of the invention.

The second, third and fourth aspects of the invention may include any of the details, options and possibilities set out elsewhere in the application.

The invention, and its use, will now be described, by way of example, with reference to the accompanying drawings, in which:-

Figure 1 is a view of the basic prosthetic disc with a textile fabric encapsulating a block of viscoelastic rubber;

Figure 2 is a view of the preferred cross-section in the frontal plane for a cervical disc;

Figure 3a illustrates a top plan view of a block for use in a spinal prosthesis;

Figure 3b illustrates a maximum cross section of the block of Figure 3a;

Figure 3c illustrates a minimum cross section of the block of Figure 3a;

Figure 3d illustrates a side view of the block of Figure 3a;

Figure 3e illustrates a side view of an alternative embodiment of the block of Figure 3a;

Figure 4 is a view of the basic prosthetic disc in situ between adjacent spinal vertebrae;

Figure 5 is a similar view to Figure 4 for a further embodiment of the invention with the addition of a "cat's cradle" of suture threads which acts to secure the disc prosthesis in situ within the disc space and which contributes to the stability of the disc reconstruction by replacing the anterior annulus, which is the fibrous structure across the front of the disc space;

Figure 6 is a similar view to Figure 4 for a further embodiment of the invention but with the "cat's cradle" replaced with a textile fabric which may be

-9-

either a separate textile fabric placed across the opening of the disc space or a textile fabric that is attached to the disc prosthesis.

Figure 7 is a similar view to Figure 6 for a further embodiment of the invention but with the element of the invention across the front of the disc space created from a continuation of the encapsulating fabric;

Figure 8 is a similar view to Figure 7 for a further embodiment of the invention but with the continuation of the encapsulating fabric forming an interdigitation with the continuation of the upper fabric passing through a hole in the lower fabric and being attached to the lower vertebral body and the continuation of the lower fabric crossing to its fixation site on the upper vertebral body;

Figure 9 is a plan view of the fabric profile used in the Figure 8 embodiment of the invention;

Figure 10 is a similar view to Figure 6 for a further embodiment of the invention but with additional fabric across the front of the device which may either be a separate fabric or a continuation of the encapsulating fabric;

Figure 11 is a plan view of the fabric profile used in the Figure 10 embodiment of the invention;

Figures 12 and 13 are perspective views of a modified version of the embodiment of the invention illustrated in Figure 8;

Figure 14 illustrates the prosthesis of Figures 12 and 13 in situ in a spine, in cross section;

Figure 15 illustrates a plan view of the fabric profile of a further embodiment of the invention;

Figure 16 illustrates the fabric profile of Figure 15 in a part assembled state, prior to insertion of the core;

Figure 17 illustrates the embodiment of Figure 16 in a final assembled form;

-10-

Figure 18 illustrates the torque against rotational angle results for a sagittal rotation test on a monosegment C4/5; and

Figure 19 illustrates the torque versus rotational angle results for a lateral rotational test on a C4/5 monosegment.

In Figure 1, an elastomeric rubber block such as silastic, is encapsulated and held in compression by a textile fabric 2.

The elastomeric block may be a silicone rubber, for instance with a Shore A scale hardness of 35-80°.

The fabric used in the invention may be formed by flat or circular weaving, knitting, braiding or preferably embroidery. A wide variety of fibre materials are applicable to the fabric, including, polyester, polypropylene, polyethylene, carbon fibre, glass, glass fibre, polyaramide, metal, copolymers, polyactic acid, polyglycolic acid, biodegradable fibres, silk, cellulosic and polycaprolactone fibres.

The structure of the fabric is selected such that fibrous tissue may penetrate between the fibres or threads forming the fabric. Tissue ingrowth is highly desirable and may even be possible to an extent where in growth replaces one or more components of the prosthesis. Biodegradation of the prosthesis may be encouraged in such cases, for instance giving rise to replacement of the fabric and/or even disc regrowth.

In Figure 2, the cross section has been modified to match that of the natural cervical disc with the upper surface 4 of the disc 6 having a larger surface area than the lower surface 8 of the disc. The textile fabric 2 conforms to the profile of the disc 6.

To render the prosthesis suitable for use in replacing the different discs of the spine (with their consequential variation in size) and to render the prosthesis suitable for treating a variety of patient sizes (with consequential variation in the size of the discs to be replaced) the core for the prosthesis is provided in a variety of sizes.

-11-

As illustrated in Figures 3a, 3b, 3c and 3d a variety of dimensions are of relevance in detailing the size of prosthesis core provided.

In Figure 3a the maximum length, l, from the front face 10 of the disc to the rear face 12 of the disc is illustrated, together with the actual length, s, of the inclined side 14 connecting the front face 10 of the core to the junction with the rear face 12 of the core. The length of the rear face, f, between the junction with the first side 14 and second side 14 is also illustrated.

Figure 3b illustrates the maximum cross section of the core, normally taken parallel to front face 10, and generally the cross section extending between one rear face 12 to side 14 junction and the other rear face 12 to side 14 junction. The cross section illustrates the maximum upper width, uw, and the maximum lower width, lw.

The Figure 3c illustration displays the minimum width cross section, generally provided at or in proximity to the front face 10. This Figure illustrates the minimal upper width, un, and the lower minimal width, ln.

Figure 3d illustrates, from the side, the variation in thickness of the core between the front face 10 and the rear face 12. The maximum thickness, mt, is generally provided at or in proximity to the rear face 12, with the lowest thickness, lt, generally being provided at or in proximity to the front face 10.

The corners of the core are generally rounded, as illustrated.

Typical sizes for the dimensions described above may be provided according to the following table.

-12-

Max upper width (uw)	Max lower width (lw)	Min upper width (un)	Min lower width (ln)	Max thickness (mt)	Min thickness (lt)	Max length (l)	Max side length (s)	Rear face length (f)
14	12	11	10	4	3	13	12	14
14	12	11	10	3.5	2.5	12	11	14
14	12	11	10	3	2	11	10	14
13	11	10	9	3.5	2.5	13		13
13	11	10	9	3	2	12		13
13	11	10	9	3	2	11		13
16	14	13	12	5	4	14	13	16
16	14	13	12	4	3	13	12	16
16	14	13	12	3	2	12	11	16
15	13	12	11	4	3	13	12	15
15	13	12	11	3.5	2.5	12	11	15
15	13	12	11	3	2	11	10	15



-13-

Sets of prostheses of different sizes may be offered for a particular disc in the spine. The correct size may be evaluated by inserting into the vacant disc space metal spacers, each provided on a rod, and of each corresponding in its dimensions to the profile of a prosthesis.

Figure 4 is a perspective view from the front of a spine of two adjacent vertebral bodies 20, 22 with the prosthetic disc 24 in the disc space 26 between them.

Prosthesis of the type provided in the present invention are inserted following a disectomy. This involves removing the portion of the anterior longitudinal ligament spanning the vertebral space in question, removing the disc (both annulus and nucleus pulposus) and inserting into the vacant disc space the prosthesis. Where applicable, the prosthesis is then anchored in place, as described in more detail below. The front edge of the solid core is positioned level with, or more preferably recessed relative to the front edge of the vertebrae, for instance by 2 to 4mm.

This technique is surgically attractive in that the preparation of the disc space, to receive the disc prosthesis, involves steps already established for standard disc removal surgery. The surgeon is thus not required to change techniques.

In Figure 5, an equivalent disc prosthesis 24 to that employed in Figure 4 is provided, together with a "cat's cradle" construction 28 added to the front 30 of the spine.

The construction 28 is anchored to the vertebral bodies 20, 22 on either side of the disc space 26 using fixation devices 32 imbedded into the vertebrae and defining the apex of each element of the cradle. Alternatively the cradle 28 may be formed by passing the elements of the cradle, such as a suture around the head of a screw secured to the vertebral body to define the apex of each cradle element.

Other fixings, such as staples, may be used in this and other embodiments of the present invention.

This construction 28 may be formed of either single or multiple yarns, sutures, braids or other flexible textile

-14-

elements which are formed into a loop either before or during the operation.

The cradle 28 acts to secure the prosthetic disc 24 within the disc space 26 while the spine is being flexed, extended or rotated. The cradle 28 also acts to support the motion segment of the spine by providing textile fibres that match the orientation of the fibres within the natural annulus, which is the fibrous structure across the front of the disc space.

The construct or cradle 28 may be added to any of the applications shown in Figures 6 to 9.

Figure 6 shows the cradle replaced with a preformed fabric element 40, which may have fibres arranged within it which match the orientation of the cradle structure detailed above. This fabric element 40 may be either a separate element positioned across the front of the disc space 26 after the insertion of the prosthetic disc 24, as shown, or it may be attached to the disc 24. The element 40 may be secured to the vertebral bodies 20, 22 on either side of the disc space 26 by sutures passing to bone anchors (not shown) implanted into the vertebrae. Alternatively, the fabric element 40 may be secured using bone screws (not shown) passing either directly through the fabric element 40 or inserted through fixation holes in the fabric, with or without the use of a reinforcing element, such as a washer or rivet. Alternatively the fabric element 40 may be secured by a pair of metal plates (not shown), one of which is fastened to each vertebral body 20, 22 over the fabric element 40.

In Figure 7, the fabric forming the flanges 52, 54, each for attachment to a vertebral body 20, 22, is a continuation of the encapsulating fabric 56. The fabric 56 on the upper surface 58 of the prosthetic disc passing to the front of the upper vertebral body 20 and the fabric 56 on the lower surface 60 of the prosthetic disc passing to the front of the lower vertebral body 22. The elastomeric block within the fabric 56 is held in position by the upper 52 and lower 54 fabric

-15-

elements being fastened to each other in a line 62 along the front edge of the prosthetic disc.

Figure 8 shows a preferred version of the invention in its position of use. Figure 9 illustrates the plan profile of the textile element of the construction shown in Figure 8 before the sides of the encapsulating element have been fastened together. The view shows the inside surfaces of the lower face 70 and upper face 72 of the encapsulating fabric, the faces 70, 72 facing one another in the assembled form, the core being provided between these two faces. The continuations 74, 76 of the encapsulating fabric 56 form an interdigitation in the assembled state.

To assemble the fabric, faces 70, 72 are sewn together along edges 77 to form a pocket sealed at the edges 77 by the stitches and at the back by the junction 79 of the two faces 70, 72. The continuation 74 of the upper fabric 72 is passed through a hole 80 in the continuation of the lower fabric 76 and is attached to the lower vertebral body 22. The continuation 76 of the lower fabric crosses over to its fixation site on the upper vertebral body 20 as a result.

For the purposes of illustration, the flange 76 attached to the upper vertebral body 20 is secured using bone screws (not shown) received in apertures 78 in the flange 76 and the flange 74 attached to the lower vertebral body 22 is attached using sutures 82 which are in turn attached to bone anchors (not shown) imbedded in the vertebral body.

The tension on the flanges created by the extension of the spine will tend to pull the disc element even more securely back within the disc space. This is contrary to some prior art prostheses in which particularly extension of the spine can tend to promote the ejection of the disc element out of the disc space.

The visco-elastic properties of the prosthetic disc are an ideal match of the visco-elastic properties of the natural disc when the encapsulated textile / elastomeric inserts are subjected to compression / relaxation with the constructs illustrated in Figures 8 and 9. Flexion of the spine will

-16-

impose a direct compressive load on the prosthetic disc and extension of the spine will create tension in the flanges 74, 76 which will by virtue of the interdigitation impose a compressive load on the prosthetic disc.

Many of the benefits of the present invention stem from the manner in which the properties of the prosthesis directly correspond to features of the natural disc replaced. The prosthesis in effect mimics a natural disc to a large extent. The deformable core, insert or block performs a very similar function to the nucleus pulposus. The fabric encapsulation performs a very similar function to the annulus. The flanges perform a very similar function to the anterior longitudinal ligament extending down the front of the spine.

The pattern of Figure 9 may be cut out of a preformed fabric but it is preferably formed using embroidery which can optimally position the fibres within the fabric to maximise the load bearing potential of the construction.

Figures 12 and 13 are further illustrations of the embodiment of the invention illustrated in Figures 8 and 9. The prosthesis comprises a fabric sheath for an internal core of resilient but suitably deformable material. Flanges 74, 76 extend from the sheath 56 and are interdigitated, in the manner outlined above, by passing the flange 74 through the aperture 80 in the flange 76. In the illustration the flanges 74, 76 each taper outward from a reduced width where they interdigitate to an increased width towards the anchor receiving apertures 78.

In Figure 10, the type of construction shown in Figure 8 has an additional fabric element 100 added over the front of the device, in a manner similar to that shown in Figure 6. This element 100 may be either a continuation of the upper 76 or, as shown, lower 74 flange, or a separate fabric element. The additional fabric element 100 acts to increase the torsional resistance of the construction. It limits the compression of the silicon insert resulting from the tension in the flanges when the spine is placed in extension and it also

-17-

is a barrier to prevent the backing-out of bone screws used to secure the flanges to the vertebral bodies 20, 22.

Figure 11 shows a similar plan view to that shown in Figure 9 but with the addition of the fabric 100 to be attached over the front of the construction when in situ.

The prosthesis 210, Figure 14, replaces the natural disc between vertebrae 200 and 202.

As illustrated, the prosthesis 210 is provided according to the form illustrated in Figures 10 and 11 and comprises a visco-elastic block, insert or core 212, of greater thickness near the insertion side 214 than away from the insertion side 214. This conforms to the natural shape of the space between the vertebrae 200 and 202. The insert 212 is encased in the fabric 216 in the manner described above. The flanges 218 and 220 extending from the disc space are interdigitated at location 222 and fixed by bone anchors 224. The prosthesis is provided with a fabric pad 226 between the interdigitated location 222 and the core 212. This promotes the correct positioning of the core 212 relative to the vertebrae and the overall prosthesis when the spine is in both flexion and extension. By providing the pad 226 this extension of the spine tends to pull the flanges 218, 220 apart and so squeeze the pad 226 towards the interior of the disc space holding the insert 212 in position.

When the spine is in flexion, the pad 226 holds the insert 212 away from the front of the disc space where the compression force exerted by the vertebrae 200 and 202 is greatest.

The pad 226 may be provided as a distinct element, as shown, which is introduced during assembly, or more preferably, the type of construction illustrated in Figures 15, 16 and 17 may be provided.

Figure 15 represents in plan view the fabric component prior to assembly. Faces 306 and 302 face one another and contact the core in use. Flange 304 is provided with an aperture 306 through which the opposing flange 308 is

**RECTIFIED SHEET (RULE 91)**  
**ISA/EP**

-18-

interdigitated in use. Apertures 310 are provided in the flanges 304, 308 to accommodate the anchors.

This embodiment of the invention also includes laterally extending arm portions 312 made of the fabric material. These arm portions are folded into multiple folds, in use, to provide the cushion pad between the interdigitated location and the core.

Figure 16 illustrates the fabric encapsulation of Figure 15 in its assembled state prior to the insertion of the core. The arms 312 are folded in on one another to provide a cushion mounted on the lower flange 308. Once assembled in this configuration the core, not shown, is inserted into the internal space 320. Following core insertion, the lower flange 308 is passed up through the aperture 306 in the upper flange 304. This pushes the folded pad 312 across the aperture leading to the core and provides a cushion for the core. Once fully interdigitated the structure resumes the format illustrated in Figure 17.

In use the pad 312 provides the benefits outlined above in relation to Figure 14 by promoting retention of the core within the disc space. The pad provides complete encapsulation of the core and also ensures that the edge of the core is held back from the front edge of the disc space. This hold back is beneficial in ensuring that no block to the full flexion of the vertebrae adjacent to the disc space. The risk of the front edge of the prosthesis being nipped by the front edge of the disc is also reduced.

The prosthesis structures provided according to the present invention enable a more natural movement to be provided in spines where disc damage would normally necessitate fusion and no mobility at that location or the provision of a vacant disc space and hypermobility at that location. The prosthesis is closely matched to a natural disc in terms of disc height, stiffness in compression and three planes of rotation, viscoelastic behaviour and the transmission of physiological stress to adjacent vertebrae.

-19-

Prostheses of the present invention are also beneficial over those used in the prior art in terms of their ease of positioning, tolerance in positioning and in terms of the physiological nature and extent of the movement provided. Behaviour more closely replicating natural discs is provided.

It is a particularly important benefit of the present invention that the effects of introducing a prosthesis according to the invention on the adjacent motion segment of the spine are far less pronounced. Problems with increasing the rate of damage or problem formation in the adjacent discs are thus avoided too.

Whilst allowing physiological axial rotation, horizontal gliding and vertical distraction the structure of the prosthesis provides suitable constraints to excessive movement.

These benefits are provided with a prosthesis formed of materials which have proven biocompatibility in other applications, sufficient mechanical endurance and avoid wear particle formation.

Whole cervical spine and single motion segment cadaveric testing have confirmed the more natural movement achieved, both in the spine as a whole and in the individual joint. Fatigue testing over a million cycles indicated no damage to the fibre encapsulation or to the insert itself.

Figure 18 illustrates the hysteresis loop for sagittal rotation of a C4/C5 joint with a natural disc, plot A, (the arrows indicate the direction of flexure, left to right for forward, right to left for back) and for a disc according to the present invention, plot B. As can clearly be seen the plots very closely match one another reflecting the near equivalence of the prosthesis to the natural disc during such movement. The deviation between the plots is within the variation arising between two natural discs.

Figure 19 shows a similar set of hysteresis plots for a natural disc, plot A, and a prosthesis according to the invention, plot B, during a lateral rotation test, again illustrating the near equivalence in performance.

-20-

Multi-segment evaluation of the prosthesis also indicated that the position of the centre of rotation was very similar when a prosthesis according to the present invention was deployed, when compared with a fully natural disc multi-segment test.

Similarly the contribution to the movement was a far closer match between the present invention's prosthesis and a natural disc, than between any of the prior art prosthesis or surgical techniques and a natural disc multi-segment.

Over and above these advantages, if the prosthesis should fail for some reason, it is far easier to remove to the necessary extent to enable a fusion (the recognised follow up treatment for a failed prosthesis) to be performed. The present invention merely needs the fabric to be cut to an extent enabling the core to be removed. The fabric flanges can be left in-situ, avoiding problems where, for instance, significant tissue in-growth has occurred. Tissue in-growth on the flanges may be avoided by providing an in-growth retarding coating to these parts.

## CLAIMS:

-21-

1. A disc prosthesis comprising a block of an elastomeric or visco-elastic material which is encapsulated by a textile fabric.
2. A prosthesis according to claim 1 in which the elastomeric block is held under compression by the encapsulating textile fabric.
3. A prosthesis according to claim 1 or claim 2 in which the fabric is formed using weaving, knitting, braiding or embroidery.
4. A prosthesis according to any preceding claim in which the block is encapsulated by inserting the block into a textile receptacle formed by folding the fabric on to itself and stitching or sealing closed the free edges.
5. A prosthesis according to any preceding claim in which the upper surface of the disc has a larger surface area than the lower surface of the disc.
6. A prosthesis according to any preceding claim in which a flange, suitable for attachment to vertebral bodies, is provided as a continuation of the encapsulating fabric.
7. A prosthesis according to claim 6 in which the block is held in position by the upper and lower fabric flanges being fastened to each other in a line along the front edge of the disc.
8. A prosthesis according to claim 6 in which the continuation of the fabric is interdigitated with the other continuation of the fabric by passing through a hole in the continuation of the fabric.

-22-

9. A prosthesis according to claim 8 in which an additional fabric element over the front of the prosthesis is provided.

-1/7-




FIG. 1




FIG. 2




FIG. 3a




FIG. 3b




FIG. 3c




FIG. 3d



FIG. 3e

RECTIFIED SHEET (RULE 91)  
ISA/EP

-2/7-

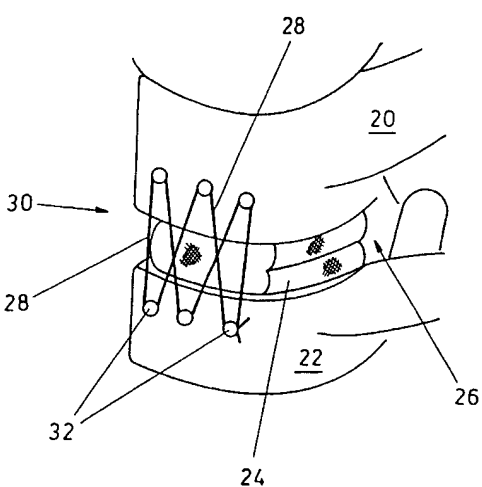


FIG. 5

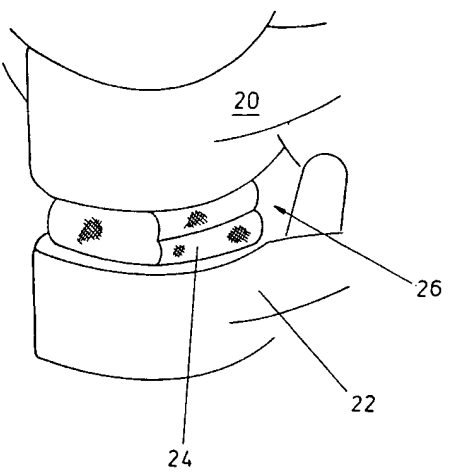


FIG. 4

RECTIFIED SHEET (RULE 91)  
ISA/EP

-3/7-

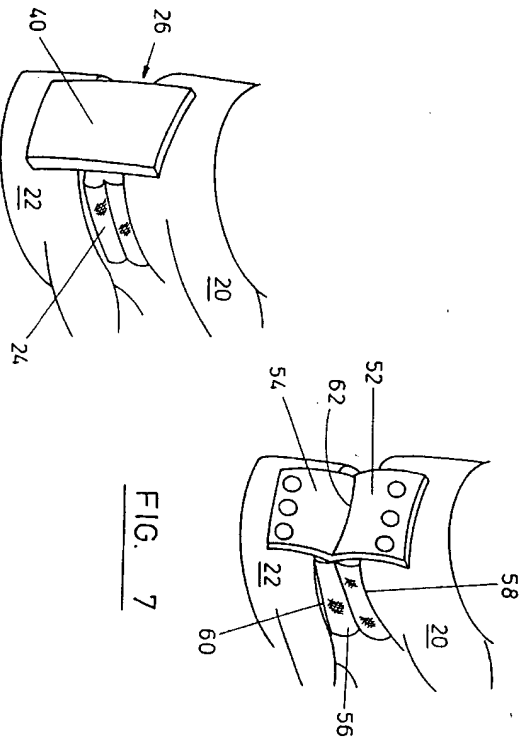


FIG. 6

FIG. 7

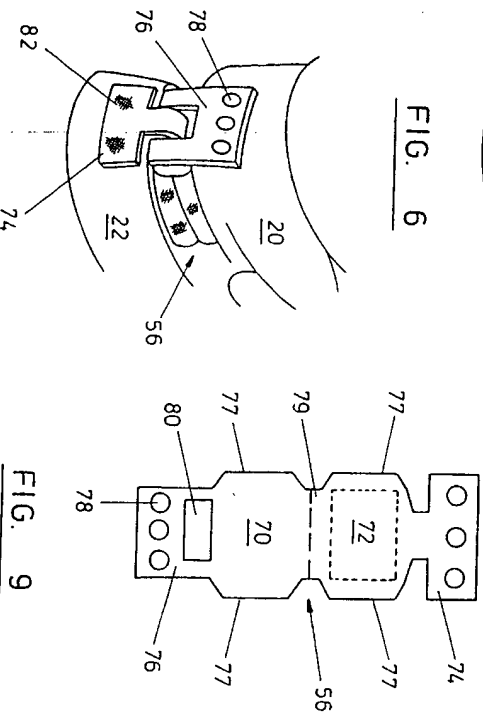


FIG. 8

FIG. 9

RECTIFIED SHEET (RULE 91)  
ISA/EP

-4/7-




FIG. 10

FIG. 11

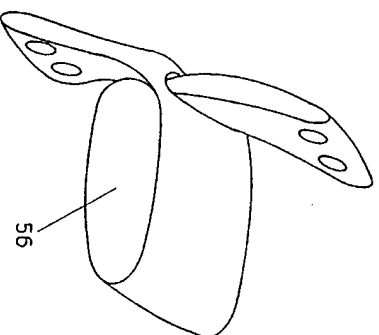
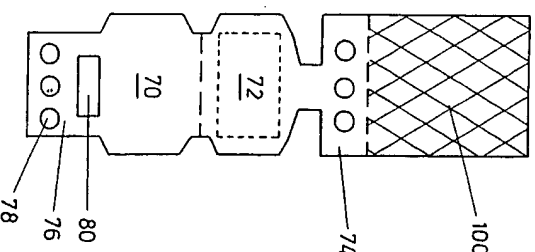


FIG. 12

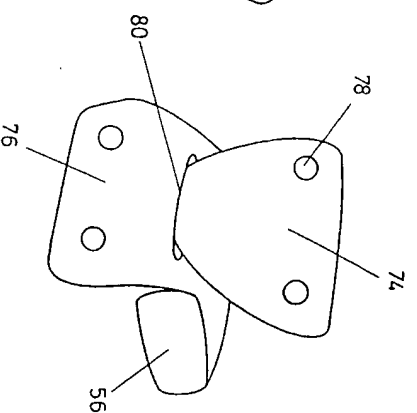


FIG. 13

RECTIFIED SHEET (RULE 91)  
ISA/EP

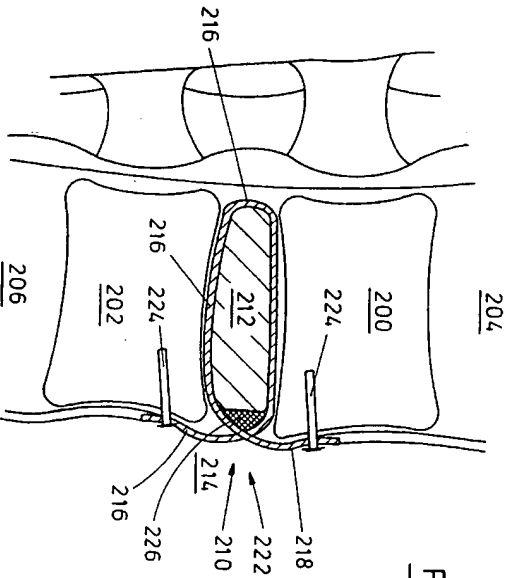


FIG. 14

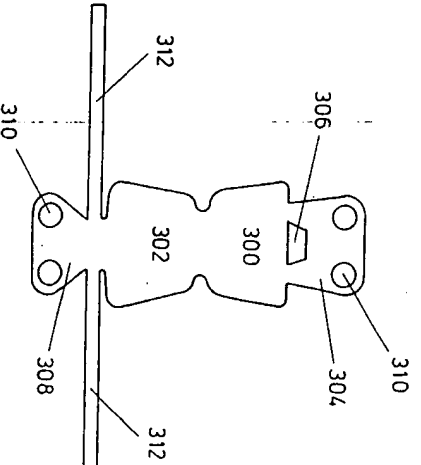


FIG. 15

RECTIFIED SHEET (RULE 91)  
ISA/EP

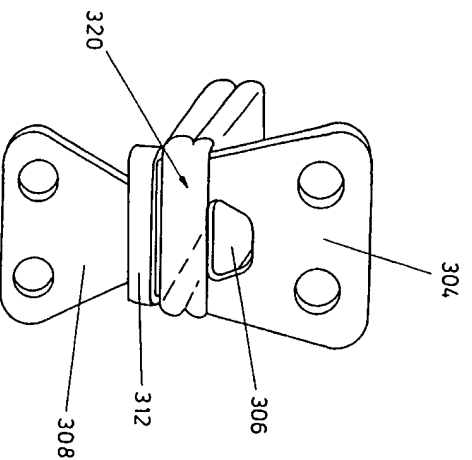


FIG. 16


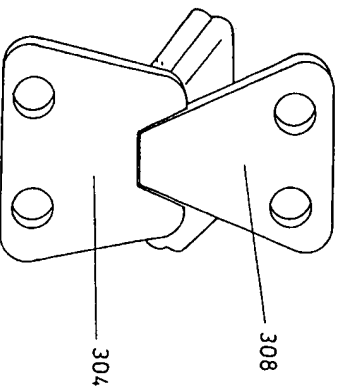


FIG. 17



RECTIFIED SHEET (RULE 91)  
ISA/EP



-717-

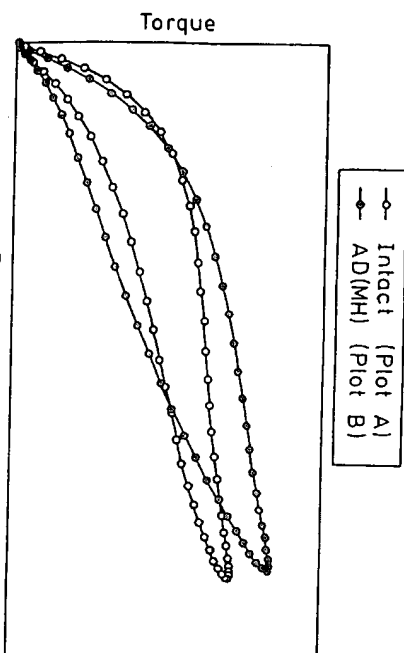

Rotation Angle

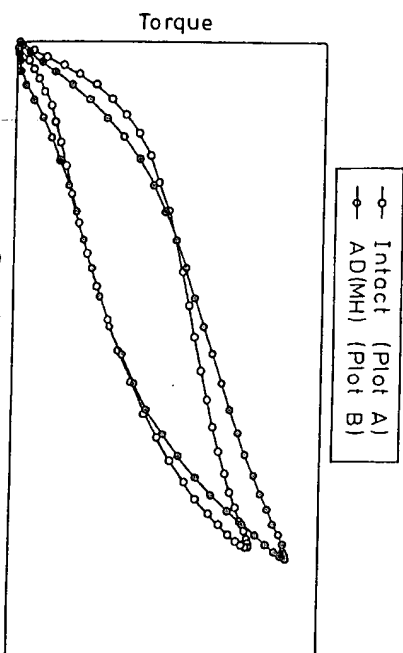

Rotation Angle

FIG. 19

**RECTIFIED SHEET (RULE 91)  
ISA/EP**

## INTERNATIONAL SEARCH REPORT

 Intentional Application No. |

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 A61F2/44

According to International Patent Classification(IPC) or to both national classification and IPC

8. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

Collection	Number of Documents	Number of Documents Considered to be Relevant
C. DOCUMENTS CONSIDERED TO BE RELEVANT		

**Category\*** Citation of document, with indication, where appropriate, of the relevant passages

Relevant to claim No.

US 3 867 728 A (STUBSTAD) 25 February, 1975  
see the whole document

9

---

A

DE 43 15 757 C (PLUS-ENDOPROTHETIK,  
10 November 1994  
see figure 7

1

EP 0 346 269 A (MELCROM MEDIZINISCHE  
PRODUKTE) 13 December 1989  
see abstract figure 2

see abstract; figure 2

A	W0 93 16664 A (LIMBS & THINGS 2 September 1993 see the whole document
---	---

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
84

1/

☒ Further documents are listed in the continuation of box C

☒ Patent lawfully members are listed in annex.

- Special categories of cited documents

\* "A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"X" document of particular relevance; the claimed invention of priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

<sup>1</sup> document which may (though the publication is not required) be cited as evidence of the publication of another document of other special nature (as specified)

<sup>2</sup> document referring to an oral disclosure, use, exhibition or other means

<sup>3</sup> document published prior to the international filing date but

later than the priority date claimed

\*.d. document member of the same patient family

12 October 1998

21/10/1998

European Patent Office, P.O. 5818 Patentaan 2  
NL - 2220 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 apo nl,  
Fax: (+31-70) 340-3016

Klein, C

# INTERNATIONAL SEARCH REPORT

Int. Application No  
PCT/GB 98/01707

Category	Citation of document, with indication, where appropriate, of the relevant passages	Referred to claim No.
A	WO 92 10982 A (PFIZER HOSPITAL PRODUCTS GROUP) 9 July 1992 see page 21, line 8 - line 11; figure 8	3
A	WO 95 19153 A (BEER) 20 July 1995 see the whole document	6
A	EP 0 346 129 A (JOHNSON & JOHNSON ORTHOPAEDICS) 13 December 1989	

From PCT/GB/98/01707 (continued on second sheet) (July 1992)

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Application No  
PCT/GB 98/01707

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3867728 A	25-02-1975	CA 992255 A DE 2203242 A FR 2124815 A GB 1306660 A SE 391122 B	06-07-1976 10-08-1972 22-09-1972 14-02-1973 07-02-1977
DE 4315757 C	10-11-1994	WO 9426213 A EP 0697843 A JP 8509645 T	24-11-1994 28-02-1996 15-10-1996
EP 346269 A	13-12-1989	DE 8807485 U CA 1325078 A DE 58905879 D JP 2111358 A US 5002576 A	10-08-1989 14-12-1993 18-11-1993 24-04-1990 26-03-1991
WO 9316664 A	02-09-1993	AU 3638893 A	13-09-1993
WO 9210982 A	09-07-1992	US 5047055 A US 5192326 A AT 126688 T AU 654173 B AU 1338592 A CA 2094135 A, C DE 9190192 U DE 69112425 D DE 69112425 T DK 563332 T EP 0563332 A EP 0662309 A ES 2076028 T GR 3017783 T IE 69177 B JP 2530089 B PT 99889 A	10-09-1991 09-03-1993 15-09-1995 27-10-1994 22-07-1992 22-06-1992 05-08-1993 28-09-1995 15-02-1996 27-12-1995 06-10-1993 12-07-1995 16-10-1995 31-01-1996 21-08-1996 04-09-1996 29-01-1993
WO 9519153 A	20-07-1995	US 5458642 A	17-10-1995
EP 346129 A	13-12-1989	US 4911718 A AU 624143 B	27-03-1990 04-06-1992

From PCT/GB/98/01707 (continued on second sheet) (July 1992)

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Inventive Application No.  
PCT/GB 98/01707

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 346129 A		AU 3609989 A	14-12-1989
		CA 1321681 A	31-08-1993
		DK 283689 A	11-12-1989
		FI 892851 A	11-12-1989
		GR 89100383 A	11-05-1990
		JP 2224659 A	06-09-1990